
LumCAT: B4TA1218 RGB

Luminaire:

Report No:

Voltage(V): 24.0000

Test No:

Current(A): 1.4040

LampCAT:

Power (W): 33.7000

Lamp flux(lm): -1.0

PF: 1.0000

Number of Lamps: 0

Ballast type:

Length(mm): 0

Width(mm): 0

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 924.82

Efficiency(%): 0.00%

Lumens(lm)/Power(W): 27.44

Central intensity(cd): 2834.831

Maximum intensity(cd): 2877.845

Angle of maximum intensity: C=315.0 γ =0.0

Beam Angle(50%Imax): [V]Left=14.0 Right=12.7

[H]Left=15.1 Right=11.8

Field angle(10%Imax): [V]Left=28.5 Right=27.1



[H]Left=29.3 Right=25.8

Effective flux(lm): 705.22

Equipment:
Temperature(°C): 0.0

Date: 2016/12/20
Humidity(%): 0.0%

Operator: GM
Distance(m): 10.12

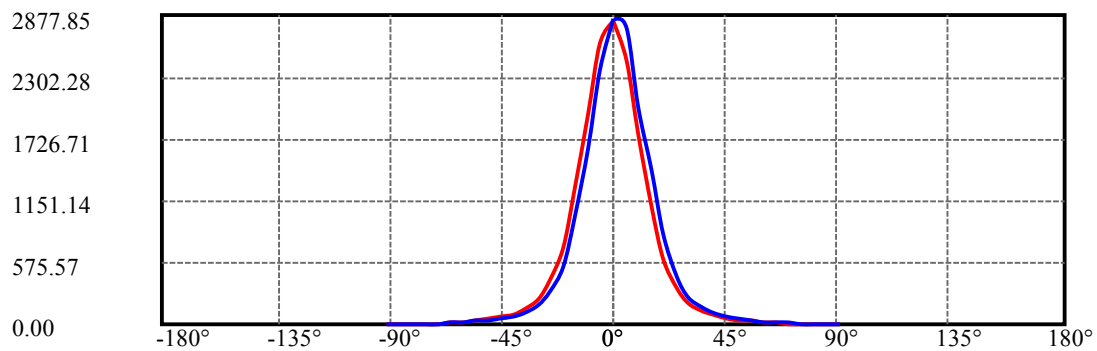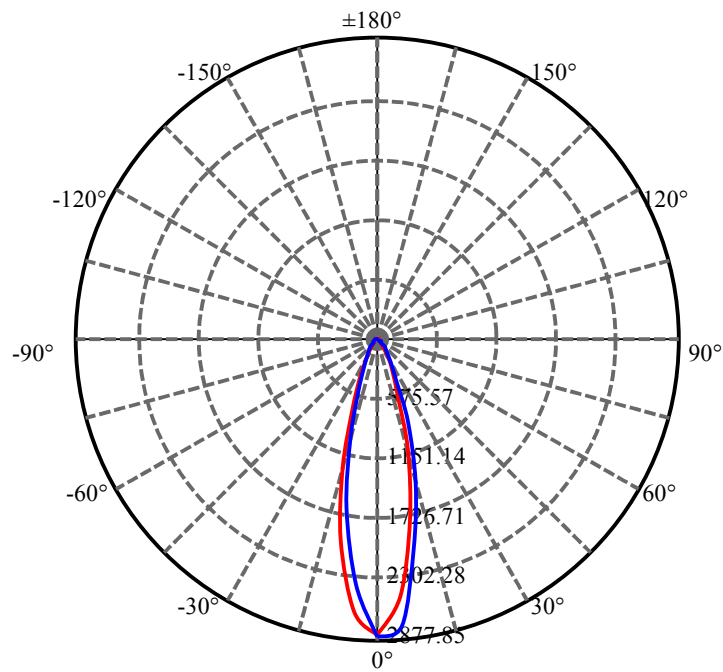

V=0 —

H=0 —

