

---

## B4TA1257 CW

---

LumCAT: B4TA1257 CW	Luminaire:
Report No:	Voltage(V): 24.100
Test No:	Current(A): 1.151
LampCAT: :	Power (W): 27.700
Lamp flux(lm): -1.0	PF: 1.000
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0

---

## Photometric Results

---



Lumens(lm): 2087.41  
Efficiency(%): 0.00%  
Lumens(lm)/Power(W): 75.36  
Central intensity(cd): 18631.580  
Maximum intensity(cd): 19870.320  
Angle of maximum intensity: C=45.0  $\gamma$ =0.0  
Beam Angle(50%Imax): [H]Left=7.7 Right=8.0  
[V]Left=5.9 Right=9.0  
Field angle(10%Imax): [H]Left=14.7 Right=14.7  
[V]Left=13.5 Right=16.2  
IES Classification : TypeI  
Longitudinal Classification : VeryShort  
Cut Off Classification : FullCutoff  
Max Cd(At 90°Vert) : 1.012036  
Max Cd(80 to 90°Vert) : 5.06018  
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire  
Street Side DownWard Lumens: - -of lamp 52.77%of Luminaire  
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire  
House Side DownWard Lumens: - -of lamp 47.23%of Luminaire

---

Equipment:  
Temperature(°C): 0.0

Date: 2015-6-17  
Humidity(%): 0.0%

Operator: GM  
Distance(m): 10.06

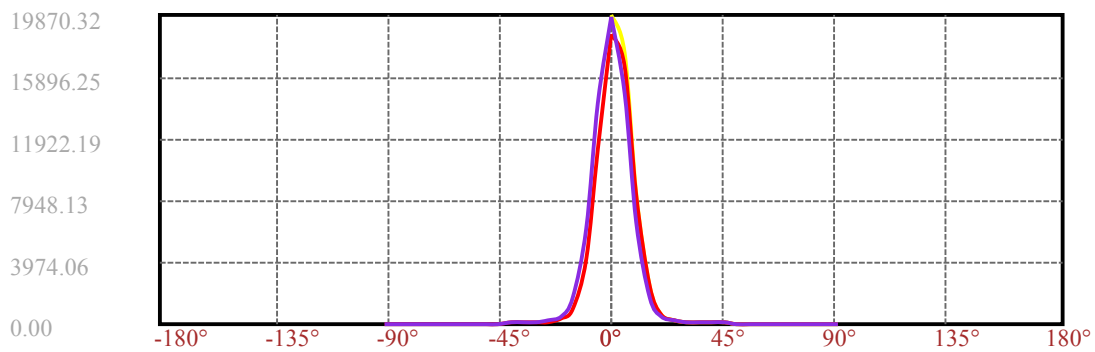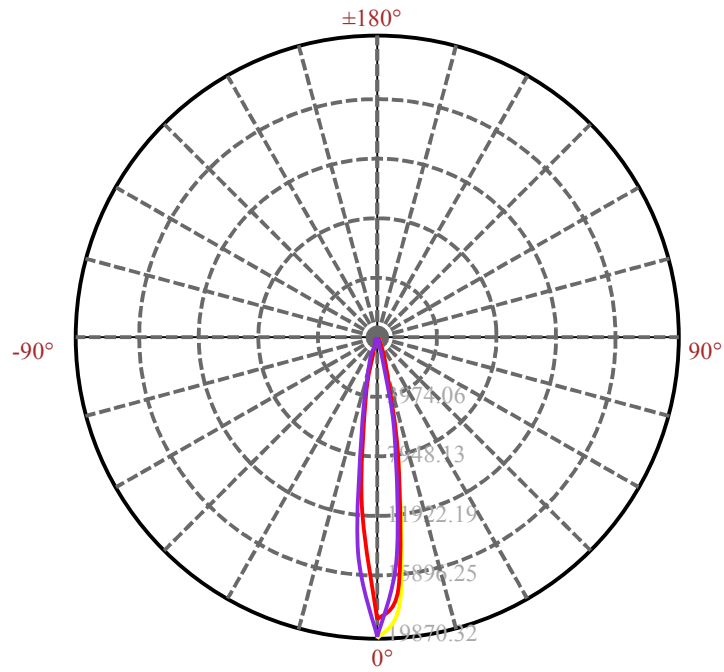

C45(Max): —————

C0/C180: —————

C90/C270: —————

