
C2FL0357 WW

LumCAT: C2FL0357 WW	Luminaire:
Report No:	Voltage(V): 240.100
Test No:	Current(A): 0.057
LampCAT: :	Power (W): 6.500
Lamp flux(lm): -1.0	PF: 0.473
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0



Photometric Results

Lumens(lm): 283.29
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 43.58
Central intensity(cd): 464.900
Maximum intensity(cd): 1633.677
Angle of maximum intensity: C=90.0 γ =10.0
Beam Angle(50%Imax): [H]Left=6.7 Right=14.5
[V]Left=7.1 Right=10.7
Field angle(10%Imax): [H]Left=16.3 Right=26.3
[V]Left=19.0 Right=22.0
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0.4177936
Max Cd(80 to 90°Vert) : 0.7311388
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 86.60%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 13.40%of Luminaire

Equipment:
Temperature(°C): 0.0

Date: 2014-4-24
Humidity(%): 0.0%

Operator: wgz
Distance(m): 10.22

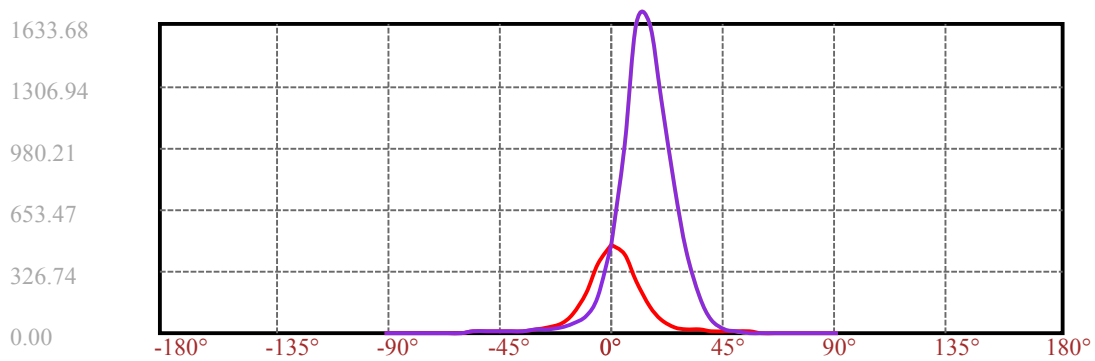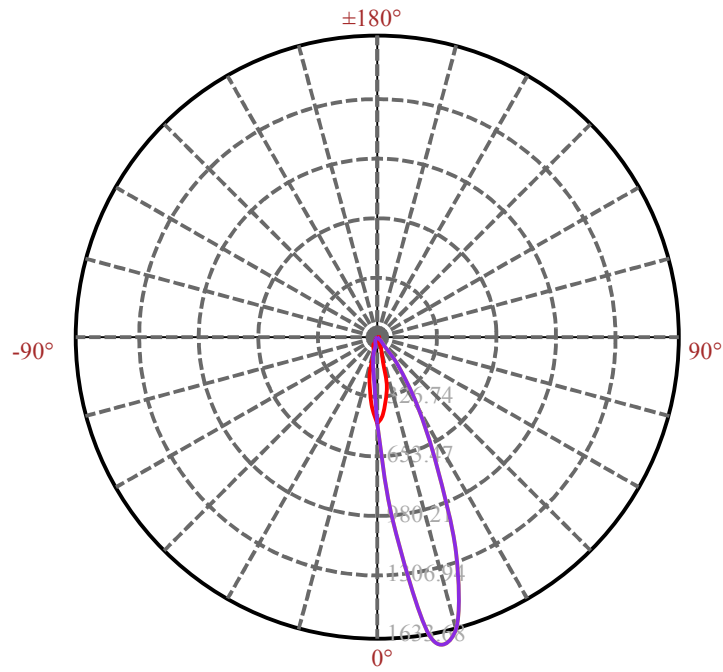

C90(Max):
C0/C180:
C90/C270:

