
C2FL0357 WW

LumCAT: C2FL0357 WW	Luminaire:
Report No:	Voltage(V): 24.500
Test No:	Current(A): 0.232
LampCAT: :	Power (W): 5.600
Lamp flux(lm): -1.0	PF: 1.000
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0



Photometric Results

Lumens(lm): 307.27
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 54.87
Central intensity(cd): 430.432
Maximum intensity(cd): 1794.319
Angle of maximum intensity: C=90.0 γ =15.0
Beam Angle(50%Imax): [H]Left=10.6 Right=9.9
[V]Left=10.3 Right=7.7
Field angle(10%Imax): [H]Left=20.1 Right=21.8
[V]Left=22.4 Right=17.2
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0.522242
Max Cd(80 to 90°Vert) : 0.8355873
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 87.29%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 12.71%of Luminaire

Equipment:
Temperature(°C): 0.0

Date: 2014-4-24
Humidity(%): 0.0%

Operator: wgz
Distance(m): 10.22

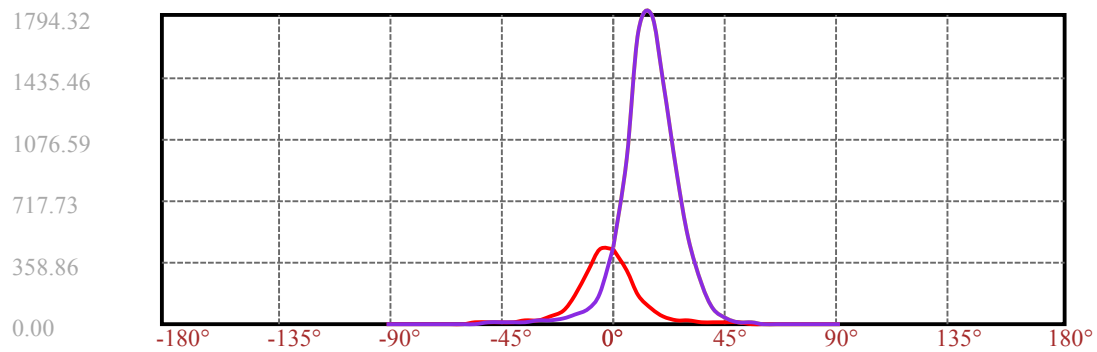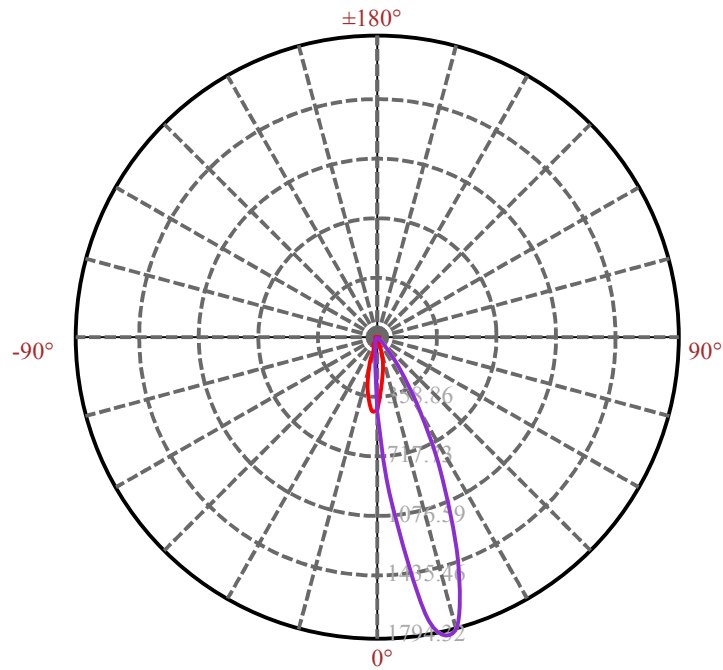

C90(Max):
C0/C180:
C90/C270:

