

---

## C2FL0357 CW

---

LumCAT: C2FL0357 CW

Report No:

Test No:

LampCAT: :

Lamp flux(lm): -1.0

Number of Lamps: 1

Length(mm): 0

Phm Type: C

Luminaire:

Voltage(V): 24.400

Current(A): 0.237

Power (W): 5.800

PF: 1.000

Ballast type:

Width(mm): 0

Height(mm): 0

---

## Photometric Results

---

Lumens(lm): 435.73

Efficiency(%): 0.00%

Lumens(lm)/Power(W): 75.13

Central intensity(cd): 793.599

Maximum intensity(cd): 2436.781

Angle of maximum intensity: C=90.0  $\gamma$ =10.0

Beam Angle(50%Imax): [H]Left=8.4 Right=15.4

[V]Left=8.2 Right=8.8

Field angle(10%Imax): [H]Left=18.6 Right=25.1

[V]Left=19.8 Right=20.4

IES Classification : TypeI

Longitudinal Classification : VeryShort

Cut Off Classification : FullCutoff

Max Cd(At 90°Vert) : 0.522242



Max Cd(80 to 90°Vert) : 1.253381

Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire

Street Side DownWard Lumens: - -of lamp 84.45%of Luminaire

House Side UpWard Lumens: - -of lamp 0.00%of Luminaire

House Side DownWard Lumens: - -of lamp 15.55%of Luminaire

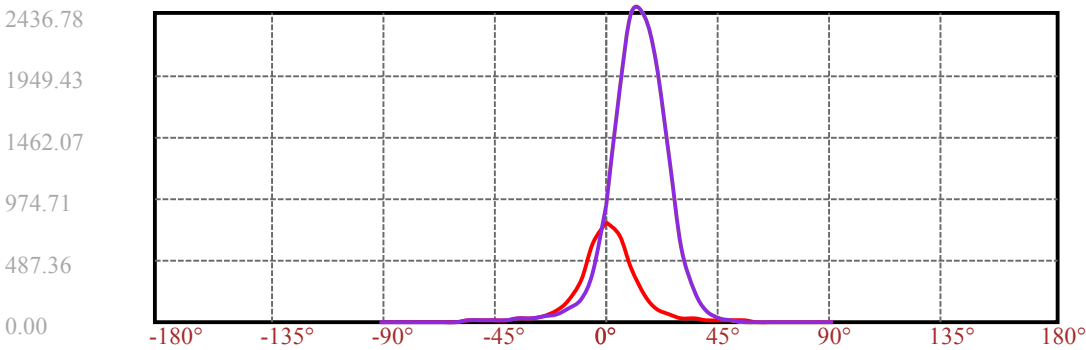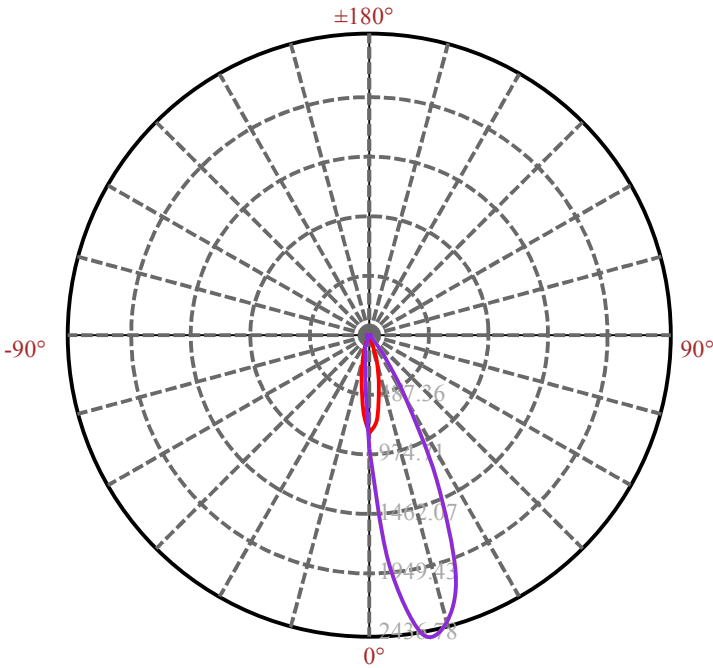

C90(Max):  
C0/C180:  
C90/C270:

