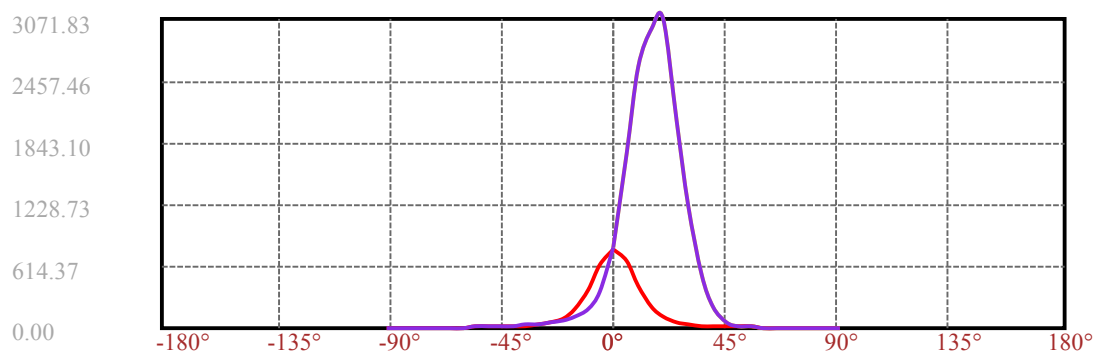
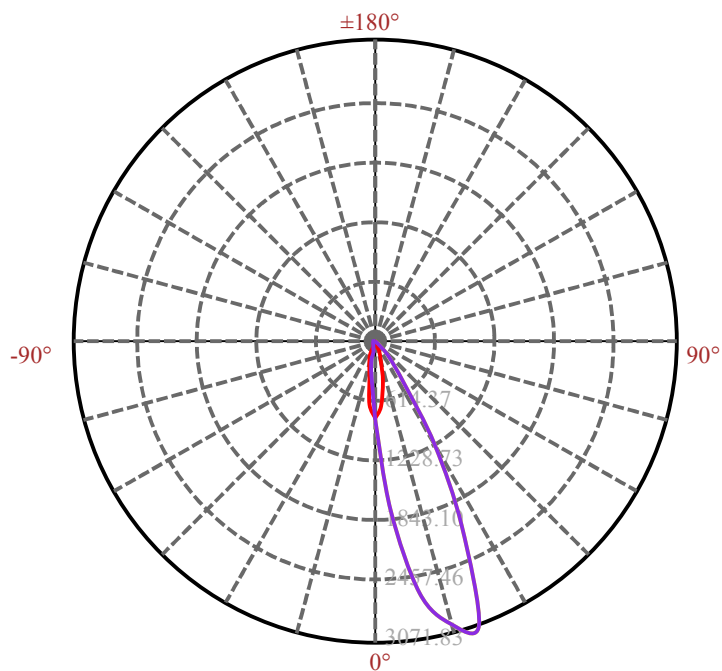

C2FL0657 WW

LumCAT: C2FL0657 WW	Luminaire:
Report No:	Voltage(V): 240.300
Test No:	Current(A): 0.056
LampCAT: :	Power (W): 12.200
Lamp flux(lm): -1.0	PF: 0.907
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0

Photometric Results

Lumens(lm): 572.44
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 46.92
Central intensity(cd): 781.692
Maximum intensity(cd): 3071.827
Angle of maximum intensity: C=90.0 γ =20.0
Beam Angle(50%Imax): [H]Left=16.1 Right=8.2
[V]Left=8.6 Right=9.3
Field angle(10%Imax): [H]Left=26.6 Right=18.5
[V]Left=18.0 Right=19.3
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0.522242
Max Cd(80 to 90°Vert) : 1.566726
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 87.54%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 12.46%of Luminaire



C90(Max):
C0/C180:
C90/C270:

