
C2FL0657 WW

LumCAT: C2FL0657 WW

Report No:

Test No:

LampCAT: :

Lamp flux(lm): -1.0

Number of Lamps: 1

Length(mm): 0

Phm Type: C

Luminaire:

Voltage(V): 24.400

Current(A): 0.423

Power (W): 10.300

PF: 1.000

Ballast type:

Width(mm): 0

Height(mm): 0

Photometric Results

Lumens(lm): 570.22

Efficiency(%): 0.00%

Lumens(lm)/Power(W): 55.36

Central intensity(cd): 567.050

Maximum intensity(cd): 3021.692

Angle of maximum intensity: C=90.0 γ =20.0

Beam Angle(50%Imax): [H]Left=14.0 Right=10.5

[V]Left=9.7 Right=9.2

Field angle(10%Imax): [H]Left=24.6 Right=20.1

[V]Left=19.4 Right=18.4

IES Classification : TypeI

Longitudinal Classification : VeryShort

Cut Off Classification : FullCutoff

Max Cd(At 90°Vert) : 0.6266904



Max Cd(80 to 90°Vert) : 1.357829

Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire

Street Side DownWard Lumens: - -of lamp 89.54%of Luminaire

House Side UpWard Lumens: - -of lamp 0.00%of Luminaire

House Side DownWard Lumens: - -of lamp 10.46%of Luminaire

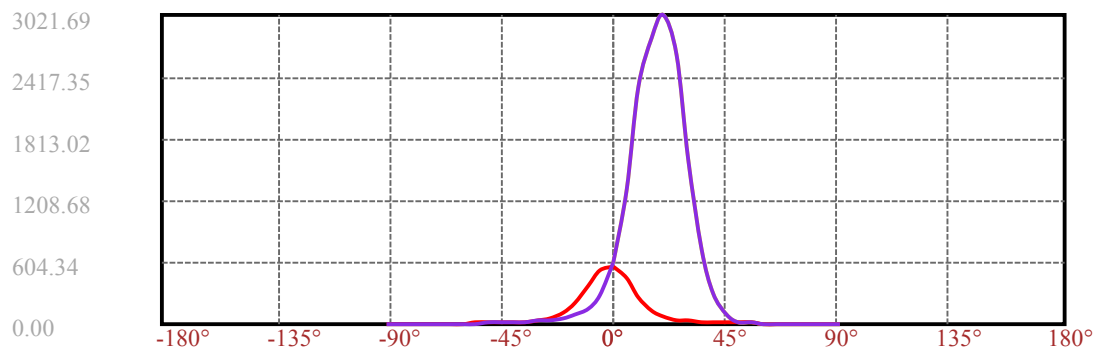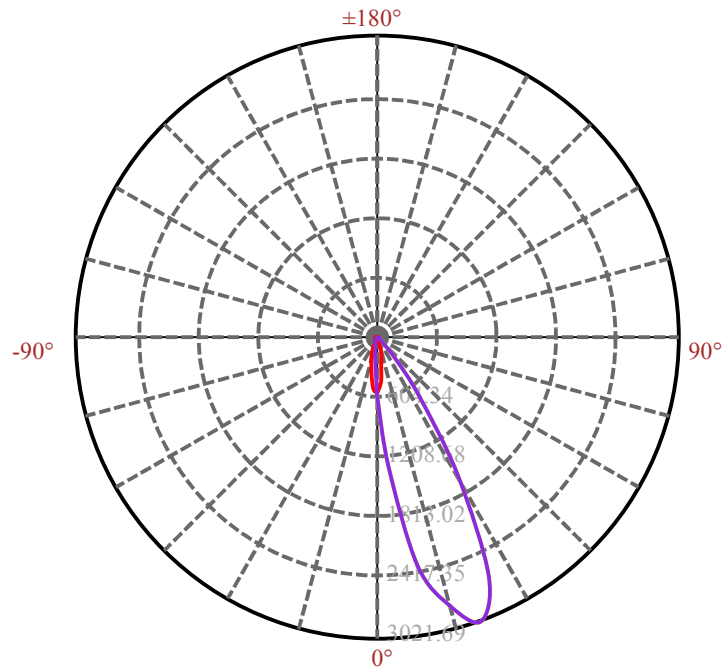

C90(Max): —————

C0/C180: —————

C90/C270: —————

