
C2FL0657 CW

LumCAT: C2FL0657 CW	Luminaire:
Report No:	Voltage(V): 240.300
Test No:	Current(A): 0.058
LampCAT: :	Power (W): 12.600
Lamp flux(lm): -1.0	PF: 0.908
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0



Photometric Results

Lumens(lm): 876.66
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 69.58
Central intensity(cd): 1122.925
Maximum intensity(cd): 4916.386
Angle of maximum intensity: C=90.0 γ =15.0
Beam Angle(50%Imax): [H]Left=11.5 Right=12.1
[V]Left=8.7 Right=8.7
Field angle(10%Imax): [H]Left=21.6 Right=22.4
[V]Left=19.8 Right=20.1
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 1.671175
Max Cd(80 to 90°Vert) : 2.506762
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 86.68%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 13.32%of Luminaire

Equipment:
Temperature(°C): 0.0

Date: 2014-4-24
Humidity(%): 0.0%

Operator: wgz
Distance(m): 10.22

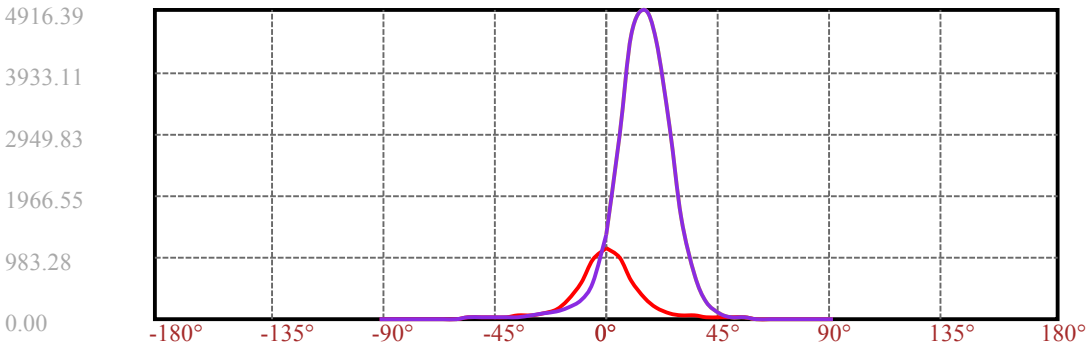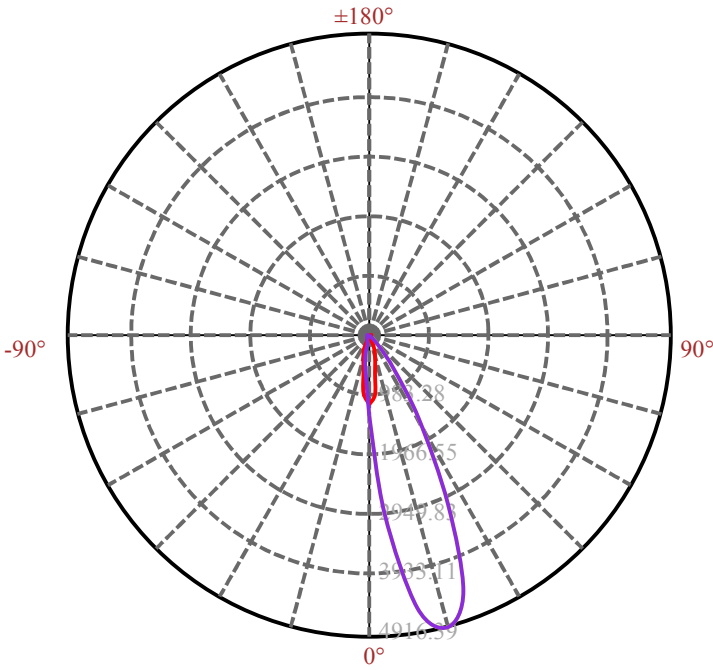

C90(Max):
C0/C180:
C90/C270:

