
R2CDR0126 WW

| | |
|----------------------|---------------------|
| LumCAT: R2CDR0126 WW | Luminaire: |
| Report No: | Voltage(V): 240.500 |
| Test No: | Current(A): 0.037 |
| LampCAT: : | Power (W): 7.800 |
| Lamp flux(lm): -1.0 | PF: 0.875 |
| Number of Lamps: 1 | Ballast type: |
| Length(mm): 0 | Width(mm): 0 |
| Phm Type: C | Height(mm): 0 |



Photometric Results

Lumens(lm): 679.96
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 87.17
Central intensity(cd): 2191.058
Maximum intensity(cd): 2191.058
Angle of maximum intensity: C=0.0 γ =0.0
Beam Angle(50%Imax): [H]Left=8.0 Right=10.7
[V]Left=7.4 Right=11.1
Field angle(10%Imax): [H]Left=38.0 Right=39.2
[V]Left=36.3 Right=39.9
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0.1012036
Max Cd(80 to 90°Vert) : 0.8096289
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 47.15%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 52.85%of Luminaire

Equipment:
Temperature(°C): 0.0

Date: 2015-12-29
Humidity(%): 0.0%

Operator: GM
Distance(m): 10.06

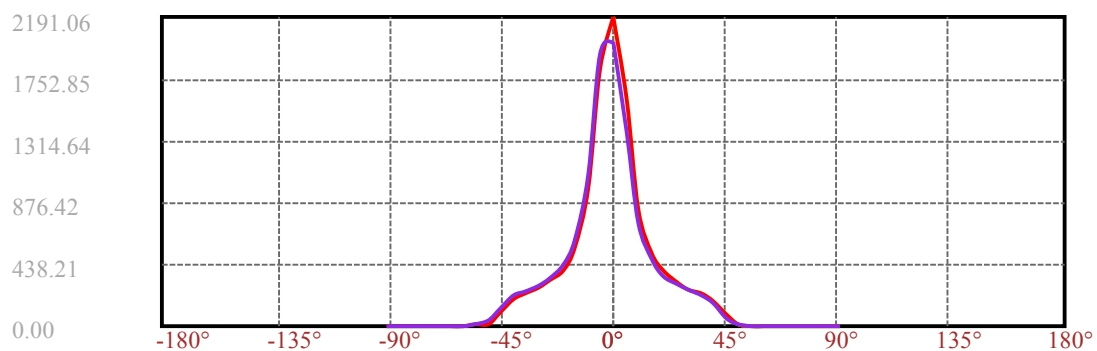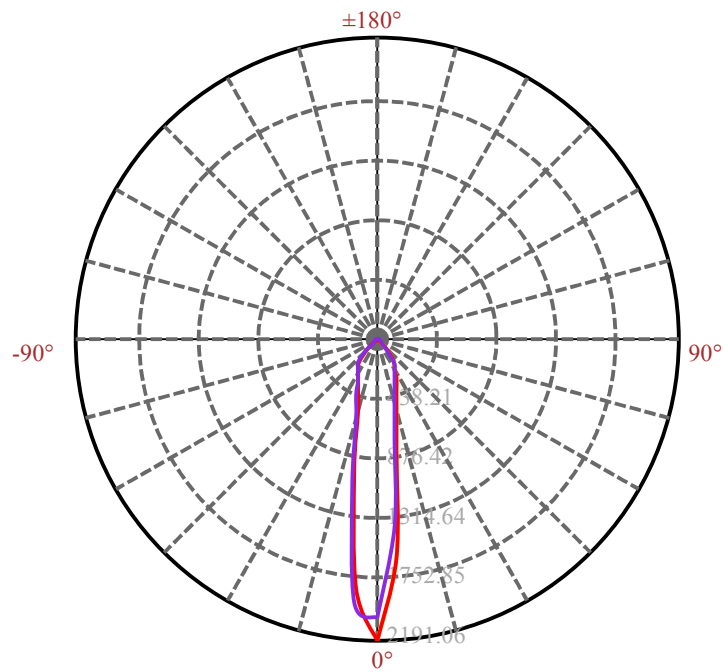

C0(Max):
C0/C180:
C90/C270:

