
R2CDR0126 WW

LumCAT: R2CDR0126 WW	Luminaire:
Report No:	Voltage(V): 240.500
Test No:	Current(A): 0.037
LampCAT: :	Power (W): 7.800
Lamp flux(lm): -1.0	PF: 0.873
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0



Photometric Results

Lumens(lm): 660.65
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 84.70
Central intensity(cd): 1411.790
Maximum intensity(cd): 1415.332
Angle of maximum intensity: C=90.0 γ =0.0
Beam Angle(50%Imax): [H]Left=13.1 Right=13.3
[V]Left=12.4 Right=14.0
Field angle(10%Imax): [H]Left=42.2 Right=42.2
[V]Left=40.4 Right=42.8
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0.1012036
Max Cd(80 to 90°Vert) : 0.6072217
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 51.29%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 48.71%of Luminaire

Equipment:
Temperature(°C): 0.0

Date: 2015-12-29
Humidity(%): 0.0%

Operator: GM
Distance(m): 10.06

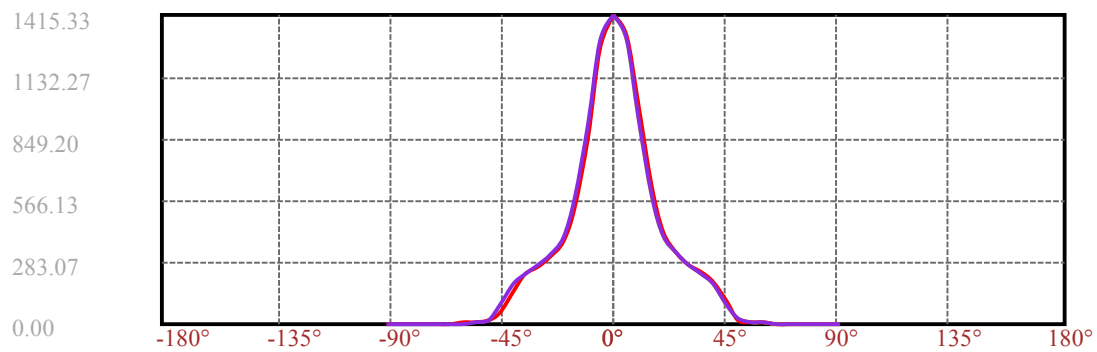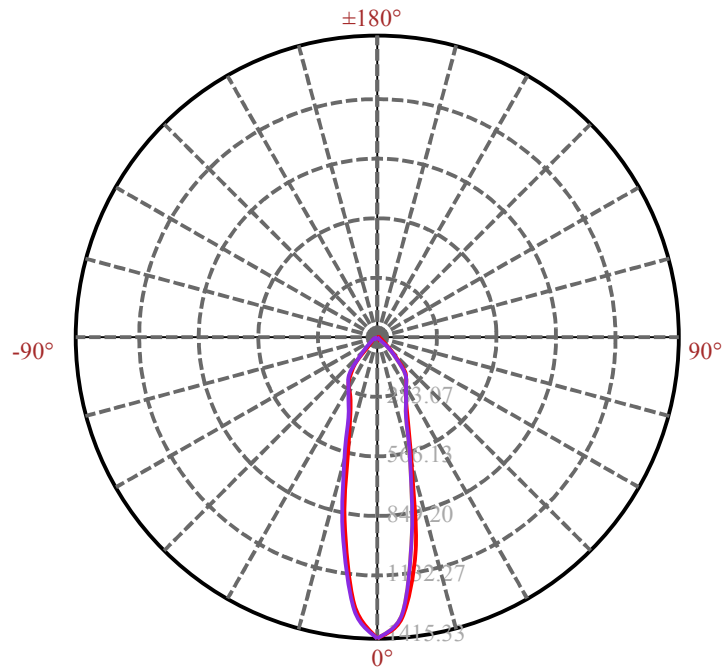

C90(Max): —————
C0/C180: —————
C90/C270: —————

